

Ladder 6085

Professional platform ladder with standard work platform and ANTI-TIPPING certification EN131-7

ASSEMBLY INSTRUCTIONS:

The ladder is sold already pre-assembled.

Only the two side rails must be assembled by unscrewing and re-screwing the screws in their housings (Total no. 8 M6x55 rounded screws with relevant self-locking nuts).

Check element integrity before each use. Follow the use instructions on the back and that indicated by safety regulations.


INSTRUCTIONS FOR USE:

Open the trestle ladder making sure it is fully extended and that the platform fully rests on the beam.


Release the platform (maximum capacity kg. 10) using the wing screw, rotating it to the horizontal use position.

Before climbing on the ladder, stabilise it using the telescopic brackets (see illustration):

- Open the bracket outwards.
- Hook the two horizontal ties to the hooks on the ladder upright.
- Lock the two ties, rotating the safety plates.
- Slide the pipe in the telescopic bracket out until it touches the ground.
- Lock the telescopic pipe with the pin (LOCK).

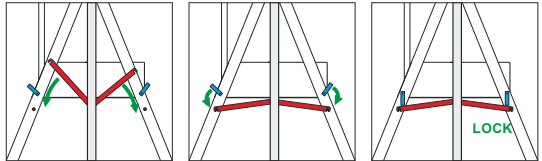

Before climbing on the ladder, make sure both telescopic brackets are correctly positioned and locked; when working next to a wall, the bracket nearest the wall can be left idle (see illustration).

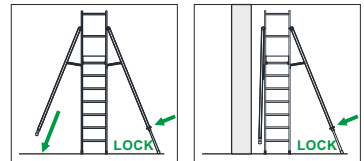

The operator working on the platform must secure himself by hooking the straps behind his back.

Follow the generic use instructions and that indicated by safety regulations (LD81).

Do not exceed the use capacity indicated on the plate (KG. 150, including one person).

Do not load the object holder with objects heavier than KG. 10 (as indicated on the label).

To move the ladder: close it, fold the holder, bind the brackets with the belts and drag the ladder on its wheels (see photo).

